
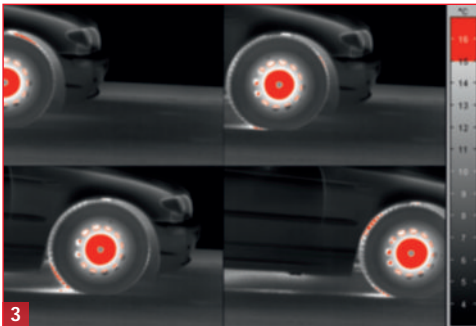


ImageIR® 5300

High-speed Thermography Camera

INFRA^{TEC}.

Europe's leading specialist for infrared sensors and measurement technology

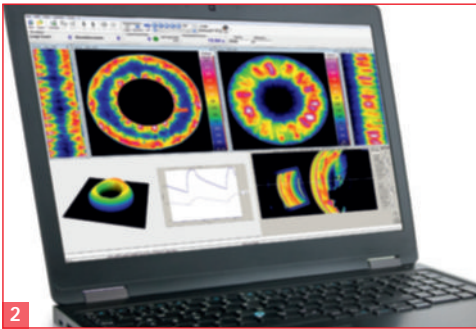

- 1) ImageIR® 5300
- 2) Software IRBIS® 3 rotate for rotation test bench
- 3) Heat development during the ABS brake process



www.InfraTec.eu

www.InfraTec-infrared.com

Made in Germany



Spectral range	(2.0 ... 5.5) μm
Pitch	30 μm
Detector	MCT
Detector format (IR pixels)	(320 \times 256)
Image acquisition	Snapshot
Readout mode	ITR
Aperture ratio	f/2.0
Detector cooling	Stirling cooler
Temperature measuring range	(-40 ... 1,200) $^{\circ}\text{C}$, up to 3,000 $^{\circ}\text{C}^*$
Measurement accuracy	$\pm 1^{\circ}\text{C}$ or $\pm 1\%$
Temperature resolution @ 30 $^{\circ}\text{C}$	Up to 0.015 K
Frame rate (full / half / quarter / sub frame)*	Up to 481 / 1,906 / 7,229 / 105,000 Hz
Window mode	Yes
Focus	Manual, motorised or automatically*
Dynamic range	Up to 16 bit*
Integration time	(1 ... 20,000) μs
Rotating filter wheel*	Up to 5 positions
Rotating aperture wheel*	Up to 5 positions
Interfaces	GigE, HDMI*
Trigger	3 IN / 2 OUT, TTL
Analogue signals*, IRIG-B*	2 IN / 2 OUT, yes
Tripod adapter	1/4" and 3/8" photo thread, 2 \times M5
Power supply	24 V DC, wide-range power supply (100 ... 240) V AC
Storage and operation temperature	(-40 ... 70) $^{\circ}\text{C}$, (-20 ... 50) $^{\circ}\text{C}$
Protection degree	IP54, IEC 60529
Dimensions; weight	(241 \times 120 \times 160) mm*; 3.3 kg (without lens)
Further functions	Multi Integration Time*
Analysis and evaluation software	IRBIS® 3, IRBIS® 3 view, IRBIS® 3 rotate, IRBIS® 3 plus*, IRBIS® 3 professional*, IRBIS® 3 control*, IRBIS® 3 online*, IRBIS® 3 process*, IRBIS® 3 active*, IRBIS® 3 mosaic*, IRBIS® 3 vision*

* Depending on model

The **ImageIR® 5300** has been designed specifically for capturing and recording extremely fast running thermal processes. The MWIR focal-plane array photon detector in the format of (320 \times 256) IR pixels allows users to capture thermal images in full frame at frequencies up to 481 Hz. When using the sub frame mode, the value even increases to 105,000 Hz.

The ImageIR® 5300 demonstrates the strength of its design as an integral part of the automated IR rotation test bench solution **Thermal Rotate Check (TRC)** from InfraTec. This allows rapidly rotating components, such as tyres, brakes and clutches, to be analysed precisely. The results provide information on how well the test objects withstand continuous operation, which signs of wear are present and how serious they are.

The potential of the camera goes far beyond such applications in automotive and rail technology. Thanks to its extensive single pixels (detector pitch 30 μm) the ImageIR® 5300 achieves an outstanding thermal resolution up to 0.015 K. Modularly designed with an optics, detector and interface module and equipped with an integrated trigger interface, the camera proves itself to be a versatile measuring and testing instrument for application in industry and science.

Lenses	Focal length (mm)	FOV ($^{\circ}$)	IFOV (mrad)
Wide-angle lens	12	(43.6 \times 35.5)	2.5
Standard lens	25	(21.7 \times 17.5)	1.2
Telephoto lens	50	(11.0 \times 8.8)	0.6
Telephoto lens	100	(5.5 \times 4.4)	0.3
Telephoto lens	200	(2.7 \times 2.2)	0.15

Macro and microscopic lenses	Object distance (mm)	Object size (mm)	Pixel size (μm)
Close-up for telephoto lens 50 mm	300	(58 \times 46)	180
Close-up for telephoto lens 100 mm	500	(48 \times 38)	150
Microscopic lens M=1.0 \times	195	(9.6 \times 7.7)	30
Microscopic lens M=1.0 \times	300	(9.6 \times 7.7)	30
Microscopic lens M=3.0 \times	22	(3.2 \times 2.6)	10

Headquarters

InfraTec GmbH
Infrarotsensorik und Messtechnik
 Gostritzer Str. 61 – 63
 01217 Dresden / GERMANY
 Phone +49 351 82876-610
 Fax +49 351 82876-543
 E-mail thermo@InfraTec.de

USA office

