

HIGH-PERFORMANCE
FAST CAMERAS



FAST M1k



*HIGH-SPEED VGA-FORMAT
SCIENTIFIC THERMAL IMAGING*

KEY FEATURES



ULTRAHIGH FRAME RATE



HIGH-SPEED INTERNAL MEMORY



HIGH SENSITIVITY




ADVANCED CALIBRATION


The FAST-IR series includes the fastest infrared cameras available on the market. The FAST M1k features a high sensitivity 640 x 512 pixel InSb array detector capable of acquiring full frame images at up to 1012 frames per second. This combination of temporal resolution and large format imagery deliver a high-end capability to monitor fast thermal events over a wide field of view.



FAST M1k

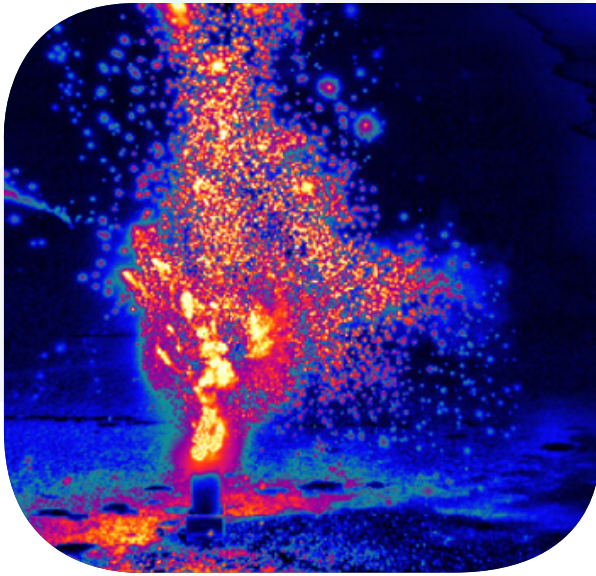

Fireworks in-house testing

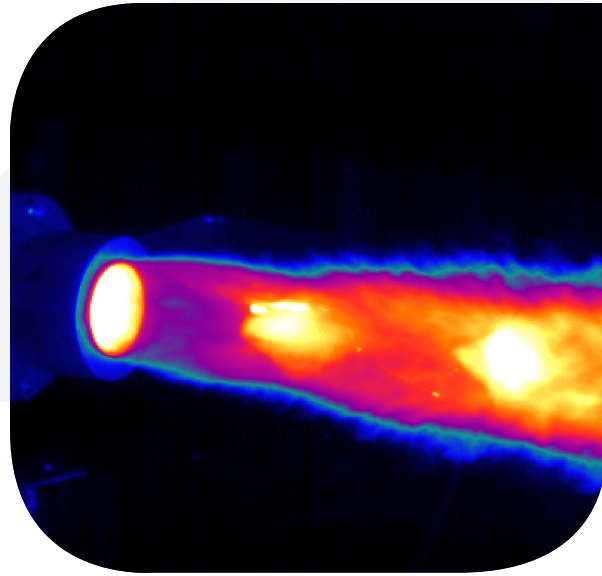

Pulsed Detonation Rocket Engine

SPECIFICATIONS

Detector Type	Cooled InSb
Detector Format	640 x 512 pixels
Spectral Range	1.5 – 5.4 μm (Option 3.0 – 5.0 μm)
Detector Pitch	25 μm
Aperture Size	F/2.5
Typical NETD	25 mK
Exposure Time	0.27 μs to full frame rate
Frame Rate	1 012 Hz
Maximum Frame Rate	11 000 Hz @ 64 x 64 40 000 Hz @ 64 x 8
Environmental Resistance	IP67
Operational Temperature	-15 °C to +50 °C
Storage Temperature	-35 °C to +60 °C
Lens Mount	Bayonet

TECHIMAGING

WWW.TECHIMAGING.COM

**REQUEST A DEMO
PRICING AND AVAILABILITY
imaging@techimaging.com**

© Telops. The information furnished is believed to be accurate and reliable, but is not guaranteed and is subject to change without notice. No liability is assumed by Telops group of companies nor by any Exosens Group companies. Performance data represents typical characteristics as individual product performance may vary. Customers should verify that they have the most current product information from the Telops group of companies before placing orders. Texts and pictures may not be considered as contractually binding. This document may not be reproduced, in whole or in part, without the prior written consent of Telops.