




WiDy
Sens

It makes SenSe!

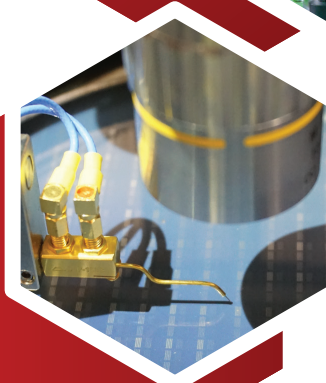

WiDy Sens 320

High Sensitivity & HDR SWIR camera

Dual mode InGaAs sensor (Lin & Log)
qVGA (320x256 px)

Short-wave Infrared Imaging from 900nm to 1700nm



niT

NEW IMAGING TECHNOLOGIES
PREMIUM SWIR BY LYNRED

www.new-imaging-technologies.com

Technical Specifications



WiDy Sens 320

Sensor	NIT's NSC2001T-SI
Resolution	320 x 256 pixels - 15µm pixel pitch
Frame rate	1K Hz full frame
Output	USB3.0, CamLink, GigE
Gating mode	No
Dimensions	46 * 46 * 53/59.7 mm
Spectral response	0.9 to 1.7 µm
Sensor Material	InGaAs
Response	Linear (CTIA) Low & High Gain Logarithmic
Modes	IWR/ITR, CDS, ROI
QE	>70%
Sensor noise	50e-
Dynamic Range	120dB
Partial Reading Mode	down to 16x16
Operating Mode	TEC on/off
Integration Time	10µs to 1s
Cooling capacity	ΔT° = 30°C
Trigger (depends on models)	Software or hardware 1x Trigger IN/OUTPUT 2x Programmable outputs
Trigger delay	Adjustable
Weight	< 240 g
Lens mount	C-Mount native
Operating Temp	-40 °C to + 70 °C
GUIs	GUI (USB & Gige): Camera Control and Image Viewer GUI (Cameralink, Analog, HD-SDI): Camera Control only
SDKs (USB & GigE)	x86-64 & Arm64 (C++, C#, Python)

Products and specifications are subject to change without notice.

OEM version available on demand

Sensors  MADE IN FRANCE
Cameras

by 

TECHIMAGING

REQUEST A DEMO
PRICING AND AVAILABILITY
imaging@techimaging.com